



Genumind Technologies Private Limited


Automatic School Bell Device **Manual**

Automatic School Bell Installation Manual

Package Contains

1. Automatic Device
2. AC Main's Wire for Input

Automatic Device

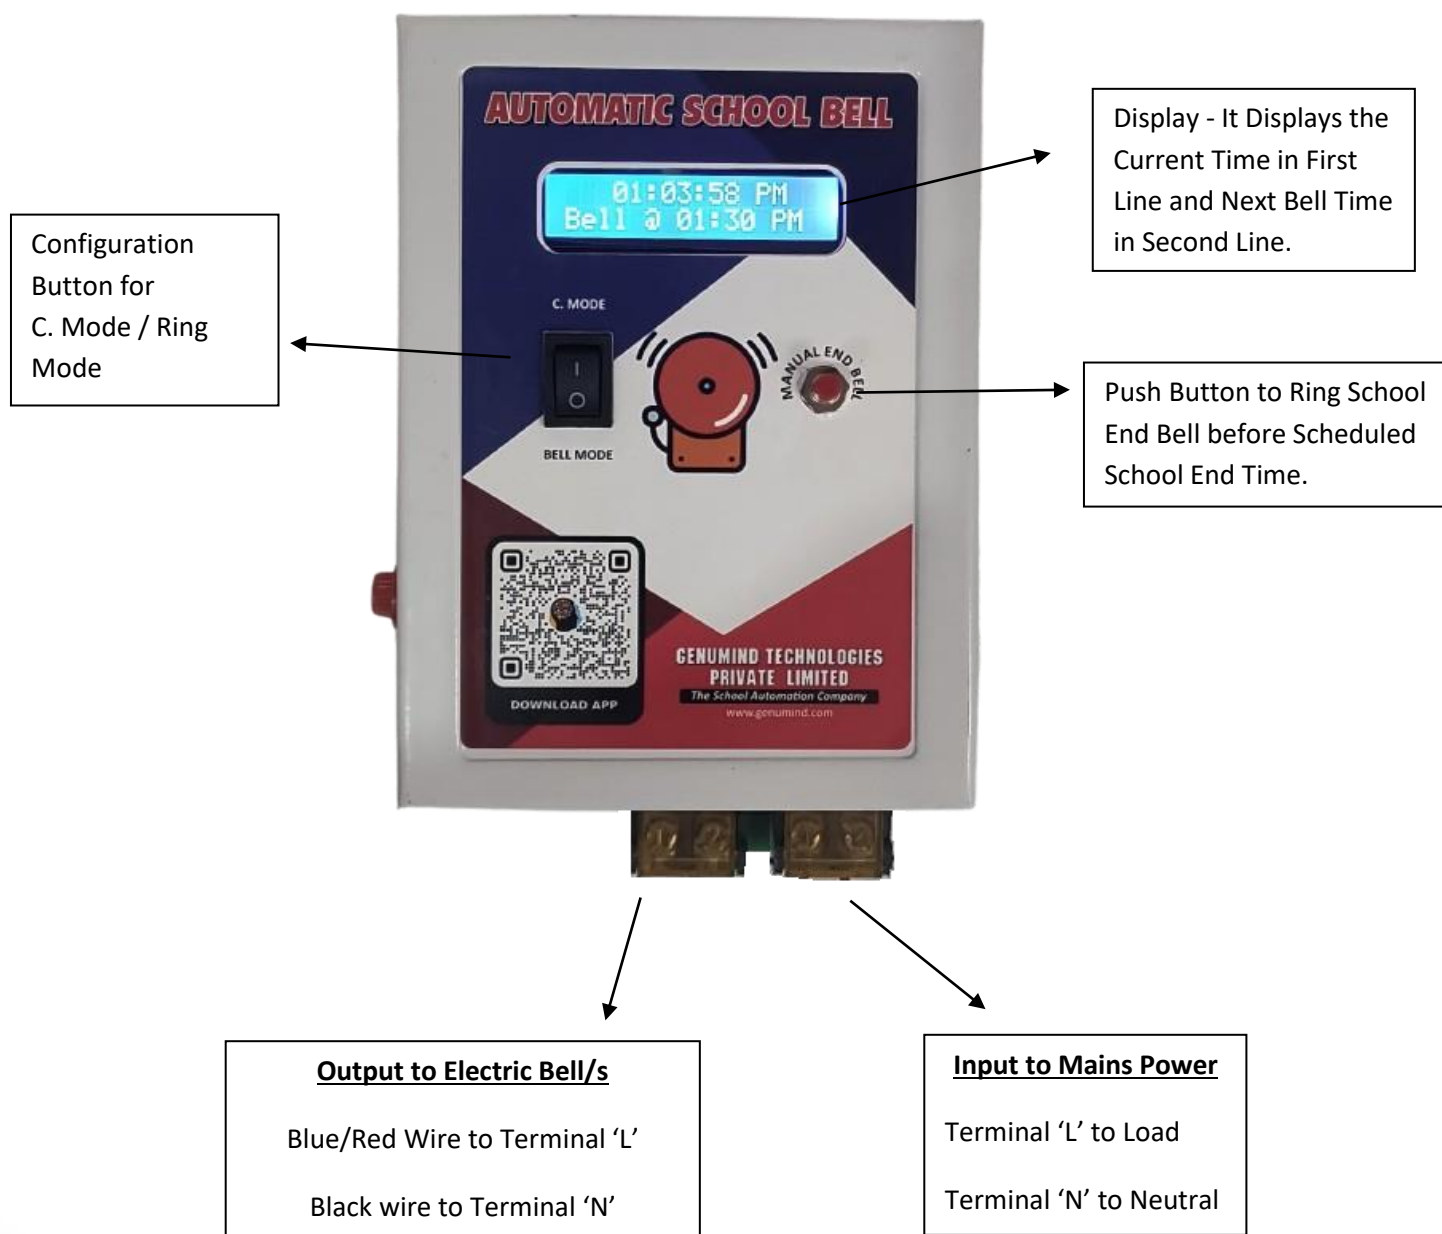

Electric Bell
(not included)



Configuration of the Device using Android App

Download the Automatic School Bell APP from the Google Play Store



Automatic School Bell

G.R. Infotech

Install




Install on phone. More devices available.

Android App Link is below

https://play.google.com/store/apps/details?id=appinventor.ai_smu_lc_software.school_bell&hl=en_IN


After this press the Configuration Button to put Device in C. Mode

Now See second line of the display of the device.

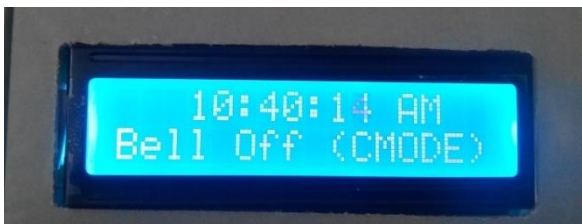

The Display will come as “Bell is Off (CMODE)” i.e. the Device is ready to be configured.

Now Open your Android phone and connect with the “School_Bell” wifi zone created by our Device.

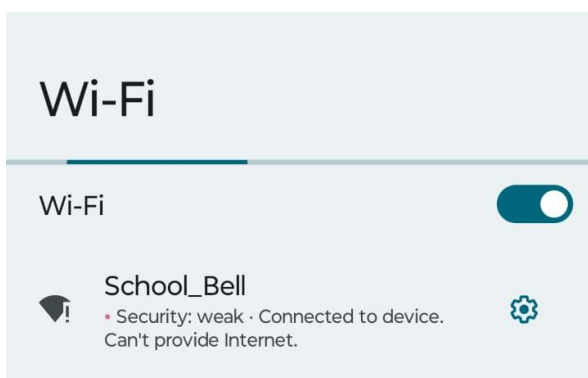

Open the School Bell App.

You will see this screen.

Enter the password

in the provided box and then


click on Connect.

Default Password is **password**

Click on Connect.



After 2-3 Seconds you will see the next Screen i.e. Navigation Panel.

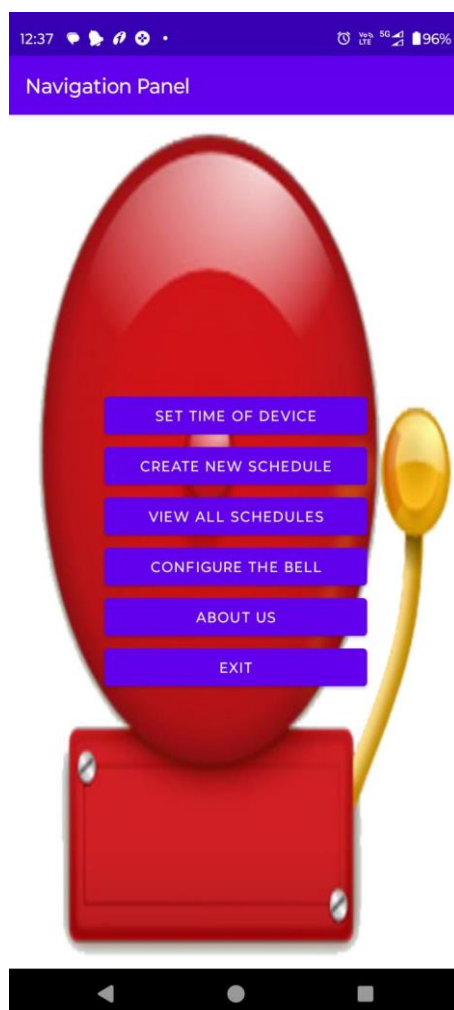

For setting the time of the device click on Set Time of Device.

You will see the Screen...

Click on Select Date and Select the Date.

After that, Click on Select Time and Select the Time.

Then Click on Set Time of Device.

The Time of the Device will be Set as per your Selected Date and Time.

And you will come again on Navigation Panel automatically.



Now you are ready to Create the Bell Schedule.

Click on Create New Schedule on Navigation Panel

First Click on Select Time of Bell.

Select on which Time you want to ring the Bell.

Select No. of Strokes from the drop down (Min – 1, Max – 9)

Now Select Seconds per Stroke for this Bell.

You Can Select Seconds per Strokes From the drop down

(Min – 1 Second, Max – 5 Seconds)

After selecting Time, Number of Strokes and Seconds per Stroke click on Add Bell Time and this Bell will be Added to the List of the Added Bells.

Added Bells			
Bell Time	Strokes	Sec/Stroke	Action

You can give any name to the created schedule and save the schedule.

12:39

5G

96%

New Schedule

Select Time of Bell :

SELECT TIME

Number of Strokes :

1

Seconds prt Stroke :

1

ADD BELL TIME

Enter Bell Schedule Name

Summer Time

CANCEL SAVE

SAVE

Once the schedule has been saved. Now you are ready to configure the Bell.



Click on Configure the Bell on Navigation Panel.

Select the Schedule from the List of already Created Schedules.

It will show you all the bells which you have added into that schedule.

Now Click on Configure Bell Button.

It will show you the Getting Ready Screen after this the APP will send all the created bells one by one to the Device.

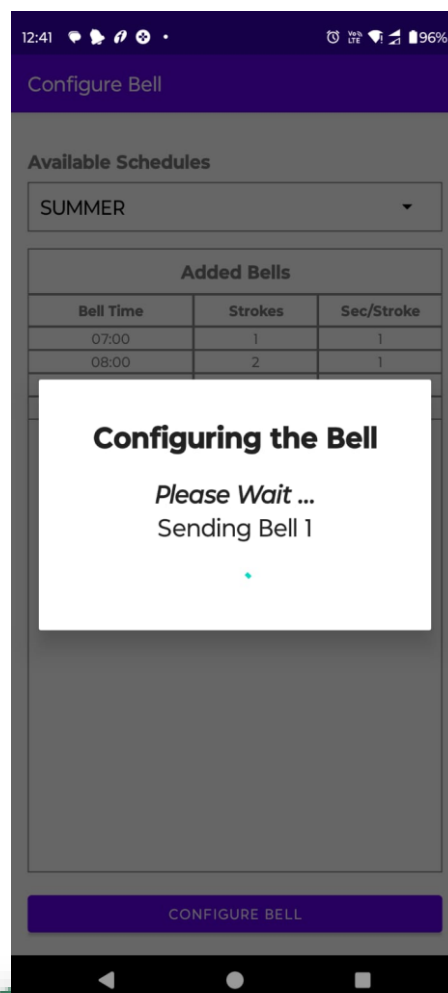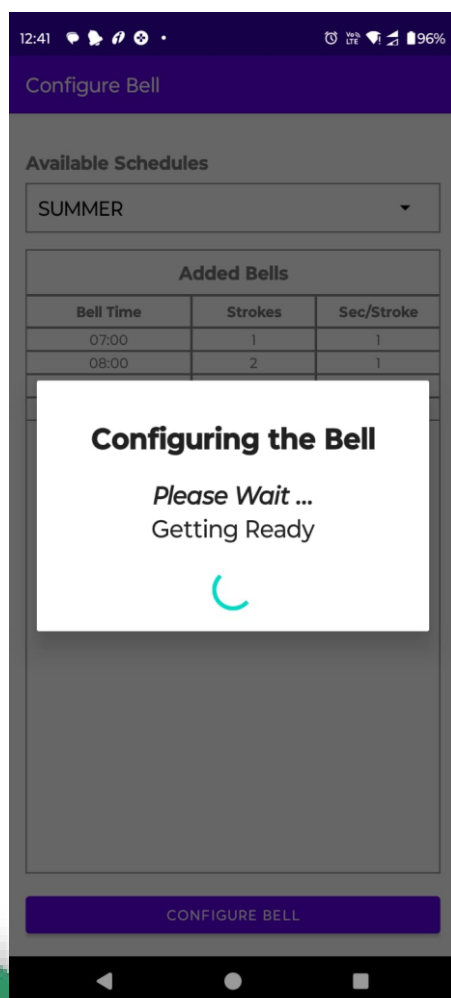

After Sending All the Bells to the Device the Configuration Completion

Message will be Displayed and Navigation Panel Will be Displayed Again.

One you have completed the Configuration you need to press the Configuration Button again to Ring Mode and now your device is ready to ring the connected Bells.

For any Further Support Please Call us on 9219602996, 9219594301 or mail to grinfotech@rediffmail.com.